

No Time Flatt – Stage Plot (Wedge Setup)

(Back of Stage)

For more information about sound contact:


Patrick Cupples

Phone: (731) 445-7474

Website: www.notimeflatt.com

Special Instructions:

- 1.) Remove most of bass (instrument) in stage monitor speaker mix. On-stage bass amp will serve as primary bass monitor.
- 2.) Set vocal monitor levels to be equal.
- 3.) Standard 120V/15 amp electrical outlet needed for bass amplifier (back of stage) & guitar pedalboard (front of stage).
- 4.) Boom stands for all microphones.
- 5.) Band provides the 3 direct boxes below.
- 6.) *Minimum Stage Size:* 10'deep x 20'wide

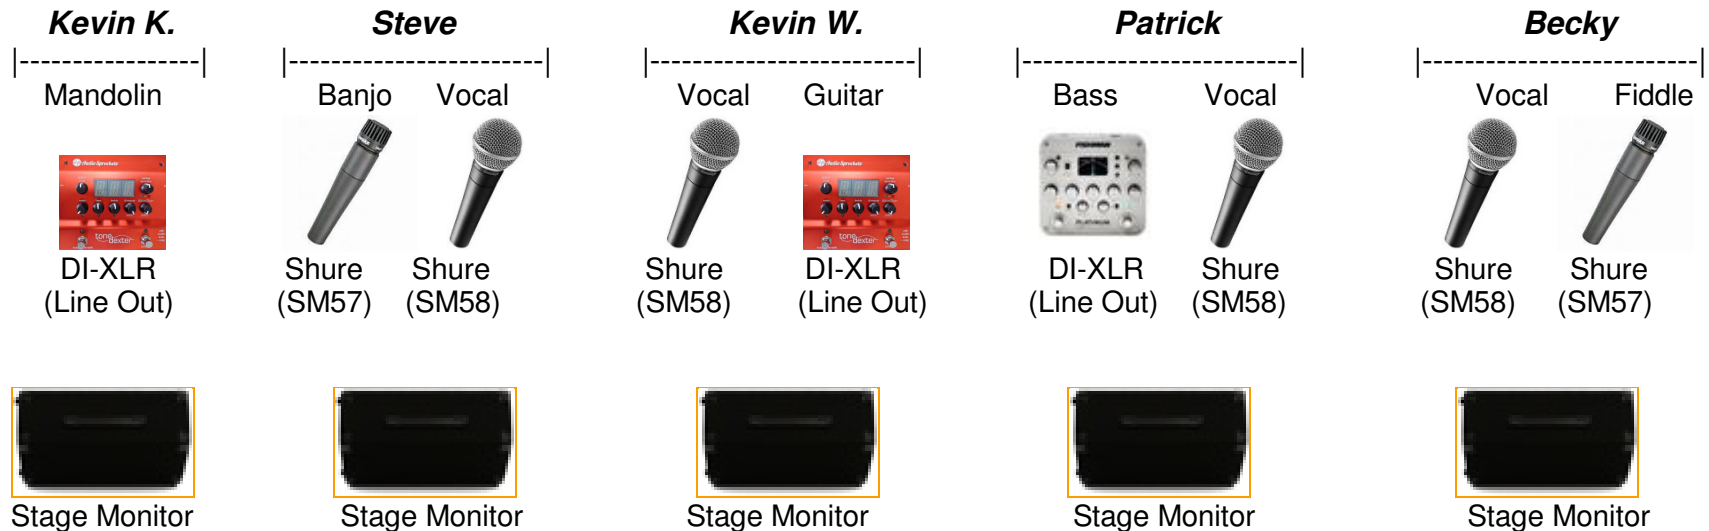

(Front of Stage)

Audience